

Heater Blower ELT - 2 - 4 - S

Heater blower for crane cabs



...Advantages:

- ✦ ...free choice of site
- ✦ ...free choice of mounting configuration
- ✦ ...mains supply switchable between 230 VAC / 400 VAC
- ✦ ...maintenance-free
- ✦ ...low-noise (49 db (A))
- ✦ ...impact resistant
- ✦ ...radial air distribution, no direct air flow

...General Description:

Our heater blower of the ELT-2-4-S series is mainly used in commercial vehicles (e.g. crane cabs) and in the industry.

Its sophisticated design allows versatile positioning.


It can be installed to the ceiling, the wall, or the floor.

Direct, disturbing airflows are avoided by the position of its air outlets.

The heating element is a contact-protected heating coil.

For safety reasons, a self-resetting overtemperature protection secures the device against overheating.

...Installation and Mounting:

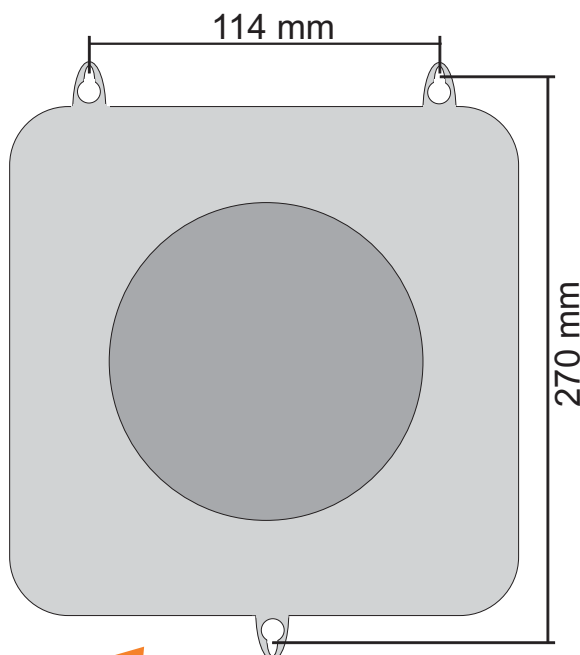

...Technical Data:

- Mains supply : 230 VAC / 50 Hz.
1950 Watt
can be switched to:
400 VAC / 50 Hz.
1950 Watt
- Protection type : IP 20
- Air flow rate : approx. 100 m³ / h
- Max. air temperature : approx. 60 °C
- Noise level : approx. 49 db (A)
- External dimensions : 230 x 230 x 150 mm
- Weight : 4.2 kg
- Fan : drum motor ALU,
balanced
- Heating : heating coil made of
chrome-nickel steel